

EOS maxi CVL Spike Light



Features

- Creates striking wall effect with focus beam.
- IP68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- Stainless steel (316) front face ensures corrosion free outdoor performance in salty and damp environments.
- Optional stake mounting offers easy installation and tool free repositioning.

Material

- Body: Stainless steel 316
- Glass: Tempered glass


Applications

- Outdoors, gardens, landscapes





EOS Maxi CVL Spike Light Series
 External 24VDC LED driver is required (Non-Dimmable)
 Lumen output: 750-850lm

Product Code	Lumen output	cd	Beam	LED power	System power	CCT	CRI	LED Brand
LED-EOS11-CVL-W3-20	750lm	3147	20°	11W	11.5W	3000K	83	CREE
LED-EOS11-CVL-W4-20	850lm	3959	20°	11W	11.5W	4000K	83	CREE
LED-EOS11-CVL-W3-60	750lm	840	60°	11W	11.5W	3000K	83	CREE
LED-EOS11-CVL-W4-60	850lm	913	60°	11W	11.5W	4000K	83	CREE



Efficiency: 74 lm/W
 Life time: 50,000 hours (70% Lumen maintenance)
 3 Years Guarantee

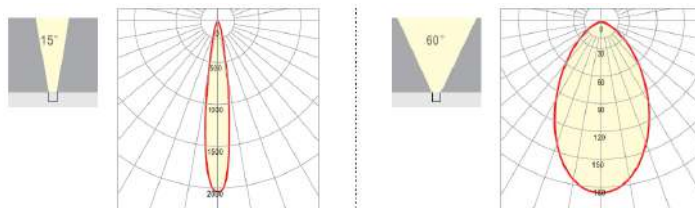

Item No	Product Code	Description
01840	LED-EOS11-CVL-W3-15	11.5W stainless steel mini landscape light, 12-24VDC 15 degree beam, Warm White
01842	LED-EOS11-CVL-W3-60	11.5W stainless steel mini landscape light, 12-24VDC 60 degree beam, Warm White
01843	LED-EOS11-CVL-W4-15	11.5W stainless steel mini landscape light, 12-24VDC 15 degree beam, Neutral White
01845	LED-EOS11-CVL-W4-60	11.5W stainless steel mini landscape light, 12-24VDC 60 degree beam, Neutral White