

## EOS mini CVL Spike Light



### Features

- Creates striking wall effect with focus beam.
- IP68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- Stainless steel (316) front face ensures corrosion free outdoor performance in salty and damp environments.
- Optional stake mounting offers easy installation and tool free repositioning.

### Material



- Body: Stainless steel 316
- Glass: Tempered glass

### Applications


- Outdoors, gardens, landscapes

EOS Mini CVL Spike Light Series  
 External 24VDC LED driver is required ( Non-Dimmable )  
 Lumen output: 250-280lm

Product Code	Lumen output	cd	Beam	LED power	System power	CCT	CRI	LED Brand
LED-EOS4-CVL-W3-15	250lm	2023	15°	4.3W	4.8W	3000K	83	CREE
LED-EOS4-CVL-W4-15	280lm	2171	15°	4.3W	4.8W	4000K	83	CREE
LED-EOS4-CVL-W3-60	250lm	185	60°	4.3W	4.8W	3000K	83	CREE
LED-EOS4-CVL-W4-60	280lm	294	60°	4.3W	4.8W	4000K	83	CREE



Efficiency: 58 lm/W  
 Life time: 50,000 hours (70% Lumen maintenance)  
 3 Years Guarantee

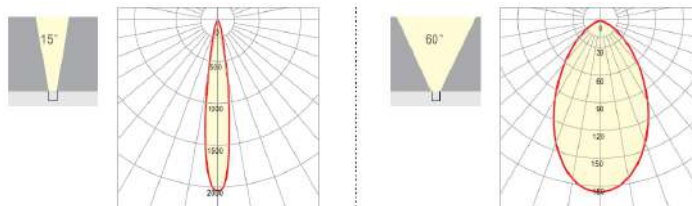

Item No	Product Code	Description
01830	LED-EOS4-CVL-W3-15	4.8W stainless steel mini landscape light, 12-24VDC 15 degree beam, Warm White
01832	LED-EOS4-CVL-W3-60	4.8W stainless steel mini landscape light, 12-24VDC 60 degree beam, Warm White
01833	LED-EOS4-CVL-W4-15	4.8W stainless steel mini landscape light, 12-24VDC 15 degree beam, Neutral White
01835	LED-EOS4-CVL-W4-60	4.8W stainless steel mini landscape light, 12-24VDC 60 degree beam, Neutral White