

K50 LED DOWNLIGHT MODULE

LED Downlight Module System



Patented



Feature

- The K50 module fits our custom mounting rings and are adaptable to fit most existing halogen MR-16 type fittings
- Anti-glare reflector with 3 beam angles, which directly replicates MR16 Halogen beam angles
- Thermal management provides great flexibility to suit a wide variety of applications
- Aesthetic pleasing design
- Delivers equal light output to premium quality 50W halogen
- 3 Year Warranty
- IPART Approved
- IP44

Temperature

- Ambient operating temperature: -20°C~+40°C
- Storage temperature: -30°C~+60°C

K50 SPECIFICATION

Replace Halogen 50W





K50 downlight module outperforms 50W Mr16 halogen

1000 Lm ~ 1100 Lm MODELS

Product Code	Downlight output CD	LED Power	System Power	CRI	CCT	LED Brand
LED-EVO-K50-22-3K	1000 lm	3777 cd	9.5 W	12 W	83	3000K CITIZEN
LED-EVO-K50-22-4K	1100 lm	4154 cd	9.5 W	12 W	83	4000K CITIZEN
LED-EVO-K50-36-3K	1000 lm	2254 cd	9.5 W	12 W	83	3000K CITIZEN
LED-EVO-K50-36-4K	1100 lm	2460 cd	9.5 W	12 W	83	4000K CITIZEN
LED-EVO-K50-60-3K	1000 lm	1438 cd	9.5 W	12 W	83	3000K CITIZEN
LED-EVO-K50-60-4K	1100 lm	1562 cd	9.5 W	12 W	83	4000K CITIZEN

Housing: aluminium with nickel coated.
Reflector: PC with AL plating
Safety Glass coated with high transmittance film
Weight: 100g

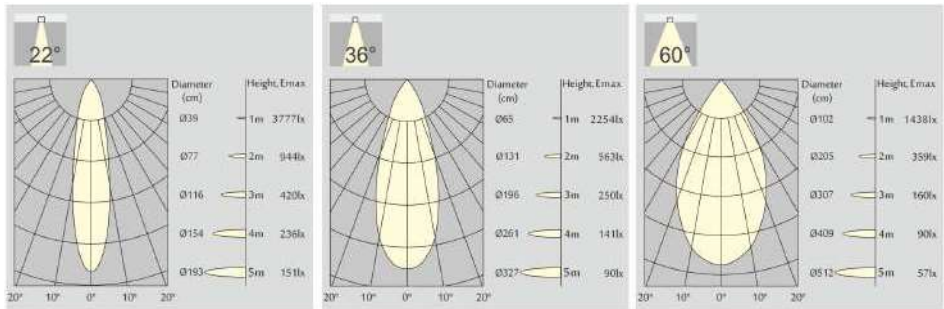

LED Driver :
External Driver (CE/CB certified)
Mains Dim: standard

Item No	Product Code	Description
08074	LED-EVO-K50-22-3000K	K-50 22 degree 3000K supplied with mains dimmable driver and flex and plug
08060	LED-EVO-K50-36-3000K	K-50 36 degree 3000K supplied with mains dimmable driver and flex and plug
08061	LED-EVO-K50-60-3000K	K-50 60 degree 3000K supplied with mains dimmable driver and flex and plug
08075	LED-EVO-K50-22-4000K	K-50 22 degree 4000K supplied with mains dimmable driver and flex and plug
08062	LED-EVO-K50-36-4000K	K-50 36 degree 4000K supplied with mains dimmable driver and flex and plug
08063	LED-EVO-K50-60-4000K	K-50 60 degree 4000K supplied with mains dimmable driver and flex and plug