

ARCHITECTURAL Flexible LED Strip

Higher Efficacy - Effi-Plus Standard Output LED Strip

The Effi-Plus Standard Output LED Strip, is extremely versatile and suitable for a large number of applications.

Applications:

- Architectural cove lighting
- Architectural concealed applications
- Architectural joinery applications
- Under bench applications

Product Specification:

Over 120Lm per/watt

Input Voltage: **24VDC**

Power Consumption: 7.2 watts per meter

LED Quantity: 70 x SMD LEDs

LED Lifespan: 70,000 hours

IP Rating: IP20

Lumens: Approx 900Lm per/M

LED Spacing: 14.28mm

Cutting Interval: 100mm

Beam Angle: 120°

Dimensions (WxH/mm): 8x1.2

Operating Temp: -20~45°C



Weight: 120g

Roll Length: 5m

IES files available on request.

90 CRI Standard

Binning in 3 step MacAdam

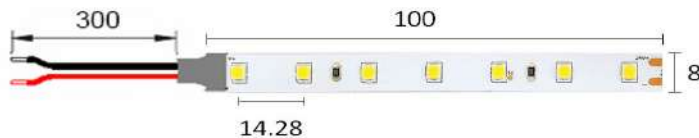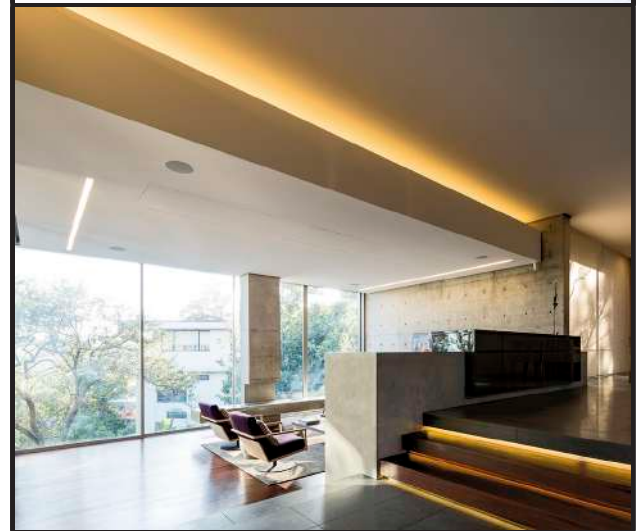

Item No	Product Code	Description
14530	LED-FLS-70-980CW	Effi-Plus Standard Output LED Strip-70LEDs Cool White 6000K-6500K 24V 7.2W 900Lm
14531	LED-FLS-70-980NW	Effi-Plus Standard Output LED Strip-70LEDs Neutral White 3800K-4200K 24V 7.2W 900Lm
14532	LED-FLS-70-980WW	Effi-Plus Standard Output LED Strip-70LEDs Warm White 2900K-3200K 24V 7.2W 900Lm
14533	LED-FLS-70-980UW	Effi-Plus Standard Output LED Strip-70LEDs Ultra Warm 2500K-2700K 24V 7.2W 900Lm
14534	LED-FLS-70-980CW-F	Effi-Plus Standard Output WP LED Strip-70LEDs Cool White 6000K-6500K 24V 7.2W 900Lm IP65
14535	LED-FLS-70-980NW-F	Effi-Plus Standard Output WP LED Strip-70LEDs Neutral White 3800K-4200K 24V 7.2W 900Lm IP65
14536	LED-FLS-70-980WW-F	Effi-Plus Standard Output WP LED Strip-70LEDs Warm White 2900K-3200K 24V 7.2W 900Lm IP65
14537	LED-FLS-70-980UW-F	Effi-Plus Standard Output WP LED Strip-70LEDs Ultra Warm 2500K-2700K 24V 7.2W 900Lm IP65

When Colour Consistency and Lumen Depreciation Matter